

PROBLEM 1. Consider two discrete memoryless channels. The first channel has input alphabet  $\mathcal{X}$ , output alphabet  $\mathcal{Y}$ ; the second channel has input alphabet  $\mathcal{Y}$  and output alphabet  $\mathcal{Z}$ . The first channel is described by the conditional probabilities  $P_1(y|x)$  and the second channel by  $P_2(z|y)$ . Let the capacities of these channels be  $C_1$  and  $C_2$ . Consider a third memoryless channel described by probabilities

$$P_3(z|x) = \sum_{y \in \mathcal{Y}} P_2(z|y)P_1(y|x), \quad x \in \mathcal{X}, z \in \mathcal{Z}.$$

(a) Show that the capacity  $C_3$  of this third channel satisfies


$$C_3 \leq \min\{C_1, C_2\}.$$

(b) A helpful statistician preprocesses the output of the first channel by forming  $\tilde{Y} = g(Y)$ . He claims that this will strictly improve the capacity.

(b1) Show that he is wrong.

(b2) Under what conditions does he not strictly decrease the capacity?

PROBLEM 2. Find the channel capacity of the following discrete memoryless channel:

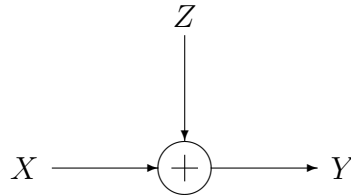

where  $\Pr\{Z = 0\} = \Pr\{Z = a\} = \frac{1}{2}$  and  $a \neq 0$ . The alphabet for  $x$  is  $\mathcal{X} = \{0, 1\}$ . Assume that  $Z$  is independent of  $X$ .

Observe that the channel capacity depends on the value of  $a$ .

PROBLEM 3. Consider the discrete memoryless channel  $Y = X + Z \pmod{11}$ , where

$$\Pr(Z = 1) = \Pr(Z = 2) = \Pr(Z = 3) = 1/3$$

and  $X \in \{0, 1, \dots, 10\}$ . Assume that  $Z$  is independent of  $X$ .

(a) Find the capacity.

(b) What is the maximizing  $p^*(x)$ ?

PROBLEM 4. A source produces independent, equally probable symbols from an alphabet  $(a_1, a_2)$  at a rate of one symbol every 3 seconds. These symbols are transmitted over a binary symmetric channel which is used once each second by encoding the source symbol  $a_1$  as 000 and the source symbol  $a_2$  as 111. If in the corresponding 3 second interval of the channel output, any of the sequences 000,001,010,100 is received,  $a_1$  is decoded; otherwise,  $a_2$  is decoded. Let  $\epsilon < 1/2$  be the channel crossover probability.

- (a) For each possible received 3-bit sequence in the interval corresponding to a given source letter, find the probability that  $a_1$  came out of the source given that received sequence.
- (b) Using part (a), show that the above decoding rule minimizes the probability of an incorrect decision.
- (c) Find the probability of an incorrect decision (using part (a) is not the easy way here).
- (d) If the source is slowed down to produce one letter every  $2n + 1$  seconds,  $a_1$  being encoded by  $2n + 1$  0's and  $a_2$  being encoded by  $2n + 1$  1's. What decision rule minimizes the probability of error at the decoder? Find the probability of error as  $n \rightarrow \infty$ .

PROBLEM 5. The Z-channel has binary input and output alphabets and transition probabilities  $p(y|x)$  given by

$$p(0|0) = 1 \quad \text{and} \quad p(0|1) = \varepsilon.$$

Find the capacity of the Z-channel and the maximizing input probability distribution in terms of  $\varepsilon$ .