

---


## Homework 8

### Quantum Information and Computation


---

#### Exercise 1

Let  $V$  a  $2 \times 2$  unitary matrix. The "double control- $V$ " gate denoted CCV is defined by the circuit

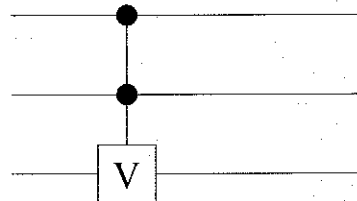


1a) Show that for all  $2 \times 2$  unitary  $U$  :

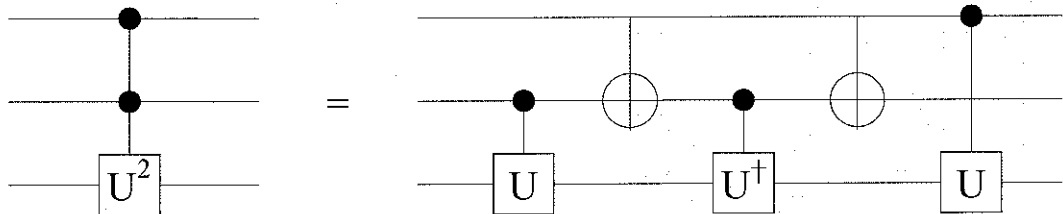

1b) Find  $U$  that realizes the quantum Toffoli gate CCNOT? Give the explicit matrix  $U$ .

#### Exercise 2

Let  $U$  a unitary matrix and  $|u\rangle$  an eigen-vector :  $U|u\rangle = \exp(2\pi i\varphi)|u\rangle$ . Consider the circuit :

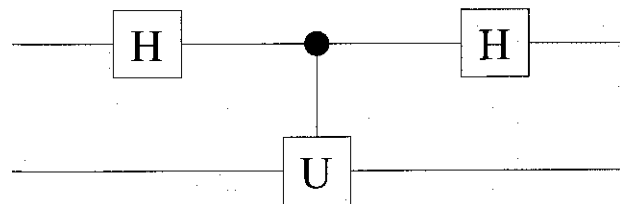

- 3a) Calculate the poutput for the initial state  $|0\rangle \otimes |u\rangle$ .
- 3b) Calculate the probability to observe the first bit in the state  $|0\rangle$  (at the output). Same question for the probability to observe it in the state  $|1\rangle$ . Same question for the probabilities to observe  $\frac{|0\rangle+|1\rangle}{\sqrt{2}}$  ;  $\frac{|0\rangle-|1\rangle}{\sqrt{2}}$  ;  $\frac{|0\rangle+i|1\rangle}{\sqrt{2}}$  et  $\frac{|0\rangle-i|1\rangle}{\sqrt{2}}$  at the output.
- 3c) Suppose we replacc  $U$  by  $U^k$ ,  $k$  integer, in the circuit above. Let  $\varphi = 0, \varphi_1\varphi_2\dots\varphi_t$  the binary expansion of  $0 < \varphi < 1$ . How does one have to choose  $k$  in order to determine the least significant bit  $\varphi_t$  with just one measurement ?